



Micro Mini Breakout Cable

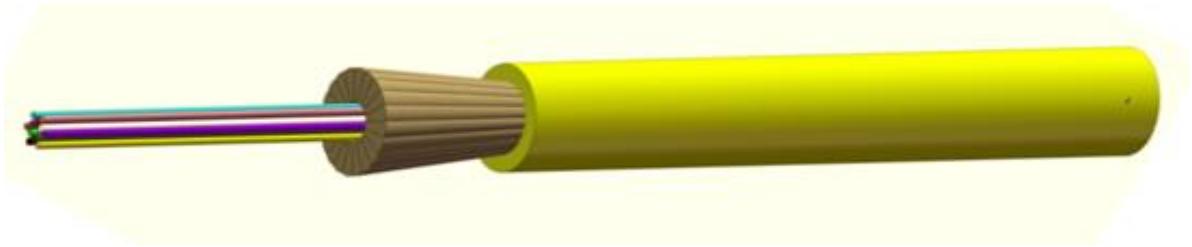

Structure:

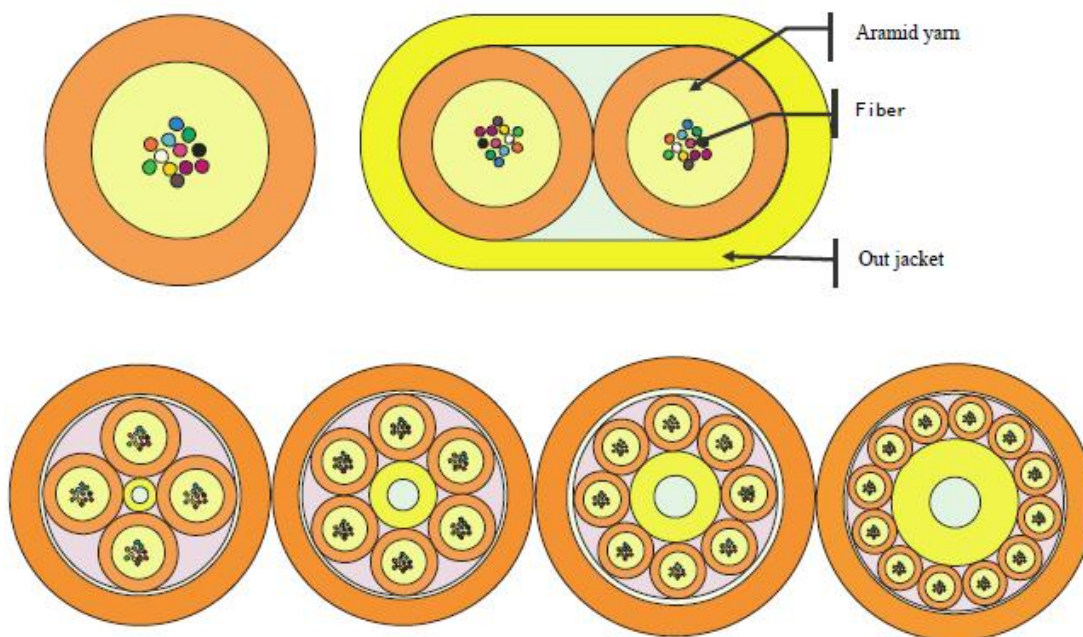

Cable Construction	Fiber Tight tube Outer Diameter, Weight	colored Ø 250um, color EIA/TIA 598 see table	
Environmental Performance Standards	Temperature range: Tensile load: Crush resistance: Impact resistance Repeated bending: Bending radius: Materials:	IEC 60794-2-10 IEC 60794-1-2 E1 IEC 60794-1-2 E3 IEC 60794-1-2 E4 IEC 60794-1-2 E6 IEC 60794-1-2 E11 2002/95/EC (RoHS)	-20 to +70°C see table see table 25cycles 500cycles 15xOD compliant
General Information	Jacket standard colors:	E9/125 G50/125 OM3 G50/125 OM4	yellow aqua heather violet
	Cable printing: customized		
Burning Characteristics	Zero halogens/Corrosive gases Flame retardant Smoke emission	IEC 60754-1/-2 IEC 60332-1/IEC 60332-3-24 IEC 61034-1/-2	

Parameter

Fiber Account	OD (mm)	Nominal Weight (kg/km)	Max Tension (N)		Max crushing Resistance (N/100)	
			Short term	Long term	Short term	Long term
12	3.0±0.15	7.8	150	80	500	150
24	4.2±0.3× 7.6±0.4	31	300	160	1000	300
36	9.0+/-0.5	78	500	180	1000	300
48	9.0±0.5	79	600	200	1000	300
72	11.2±0.5	126	1000	300	1000	300
96	13.5±0.5	178	1000	300	1000	300
144	17.5±0.5	285	1000	300	1000	300